

52908961/PIU 49 AUG 2000

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

179-163P
U.S. APPLICATION NO. (If known, see 37 CFR 1.5)
09/601838

| | | |
|---|--|--|
| INTERNATIONAL APPLICATION NO. PCT/EP99/01062 | INTERNATIONAL FILING DATE February 18, 1999 | PRIORITY DATE CLAIMED February 18, 1998 |
|---|--|--|

TITLE OF INVENTION
CAMERA TRACKING SYSTEM FOR A VIRTUAL TELEVISION OR VIDEO STUDIO


APPLICANT(S) FOR DO/EO/US
FEHLIS, Hendrik; MAYER, Thomas; SCHNEPF, Uwe; and MIKA, Thorsten

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(3)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(2)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.-1449 and International Search Report (PCT/ISA/210) w/ 9 references
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - 1.) Small Entity Statement-Non-Profit Organization
 - 2.) Small Entity Statement-Independent Inventor
 - 3.) PCT Request (PCT/RO/101)
 - 4.) Five (5) sheets of Formal Drawings

| | | | | | |
|---|--------------|-------------------------------|-----------|--|-----------|
| U.S. APPLICATION NO. (If known, use 37 CFR 1.5) | | INTERNATIONAL APPLICATION NO. | | ATTORNEY'S DOCKET NUMBER | |
| 097601838 | | PCT/EP99/01062 | | 179-163P | |
| 17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). \$670.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT = | | | | CALCULATIONS PTO USE ONLY | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). | | | | \$ | 0 |
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | | |
| Total Claims | 26 - 20 = | 6 | X \$18.00 | \$ | 108.00 |
| Independent Claims | 1 - 3 = | 0 | X \$78.00 | \$ | 0 |
| MULTIPLE DEPENDENT CLAIM(S) (if applicable) | | | Yes | + \$260.00 | \$ 260.00 |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$ | 1208.00 |
| Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28). | | | | \$ | -604.00 |
| SUBTOTAL = | | | | \$ | 604.00 |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | \$ | 0 |
| TOTAL NATIONAL FEE = | | | | \$ | 604.00 |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + | | | | \$ | 40.00 |
| TOTAL FEES ENCLOSED = | | | | \$ | 644.00 |
| | | | | Amount to be: | \$ |
| | | | | Refunded | |
| | | | | Charged | \$ |
| a. <input checked="" type="checkbox"/> A check in the amount of \$644.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account. No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-2448. | | | | | |
| NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status. | | | | | |
| Send all correspondence to: Birch, Stewart, Kolasch & Birch, LLP or Customer No. 2292 P.O. Box 747 Falls Church, VA 22040-0747 (703)205-8000 | | | | | |
|  SIGNATURE | | | | NAME | |
| | | | | #29.680 (MKM) REGISTRATION NUMBER | |

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) AND 1.27(d)) - NONPROFIT ORGANIZATION**

I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below:

NAME OF ORGANIZATION **GMD - Forschungszentrum Informationstechnik GmbH**
ADDRESS OF ORGANIZATION **Schloss Birlinghoven, 53757 Sankt Augustin, Germany**
TYPE OF ORGANIZATION
☐ UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION
☐ TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(a) and 501(c) (3))
☐ NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA
(NAME OF STATE _____)
(CITATION OF STATUTE _____)
☒ WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(a) and 501(c)(3)) IF LOCATED IN THE UNITED STATES OF AMERICA
☐ WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA
(NAME OF STATE _____)
(CITATION OF STATUTE _____)

I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under section 41(a) or (b) of Title 35, United States Code with regard to the invention entitled

Camera tracking system for a virtual television or video studio

(PCT/EP99/01062)

by inventors **Hendrick Fehlis et al.** described in

- ☐ the specification filed herewith
☒ application serial no. PCT/EP99/01062, filed February 18, 1999
☐ patent no. _____, issued _____.

I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).
*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

NAME _____

ADDRESS _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37CFR 1.28(b))

I hereby declare that I understand the English language.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Prof. Dr. D. Tsichritzis Dr. H.-G. Sundermann
TITLE IN ORGANIZATION Chairman of the executive Board Vice chairman of the
ADDRESS OF PERSON SIGNING Hauptstraße 282a Am Schlendorn 1 Executive
53639 Königswinter 53345 Wachtberg Board

SIGNATURE _____

DATE

07 Juni 00

09601838-060000

Applicant or Patentee: FEHLIS, Hendrik et al.

179-163P

Serial or Patent No.: New

Attorney's

filed or Issued: August 9, 2000

Docket No:

For: CAMERA TRACKING SYSTEM FOR A VIRTUAL TELEVISION OR VIDEO STUDIO

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled

Camera tracking system for a virtual television or video studio

(PCT/EP99/01062)

described in

- ☐ the specification filed herewith
☒ application serial no. PCT/EP99/01062, filed February 18, 1999
☐ patent no. _____, issued _____.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ no such person, concern, or organization
☒ persons, concerns or organizations listed below*

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)


FULL NAME **GMD - Forschungszentrum Informationstechnik GmbH**
ADDRESS **Schloss Birlinghoven, 53757 Sankt Augustin, Germany**


☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☒ NONPROFIT ORGANIZATION


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))


I hereby declare that I understand the English language.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.


Hendrik Fehlis


Thomas Mayer


Thorsten Mika


Uwe Schnepf

20.6.2000 20.6.2000 20.6.2000 26.6.2000
Date Date Date Date

09/601838

PATENT
179-163P

532 Rec'd PCT/PTC 09 AUG 2000

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: FEHLIS, Hendrick et al.
Int'l. Appl. No.: PCT/EP99/01062
Appl. No.: New Group:
Filed: August 9, 2000 Examiner:
For: CAMERA TRACKING SYSTEM FOR A VIRTUAL
TELEVISION OR VIDEO STUDIO

PRELIMINARY AMENDMENT

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231

August 9, 2000

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/EP99/01062 which has an International filing date of February 18, 1999, which designated the United States of America.--

IN THE CLAIMS:

Please amend the claims as follows:

Claim 5: Line 1, delete "or 4"

Claim 7: Line 1, delete "or 6"

Claim 8: Line 1, change "one of claims 1 to 7" to

--claim 1--

09/601838-1000000

Claim 10: Line 1, change "claims 9 and 4" to --claim 9--

Claim 11: Line 1, change "one of claims 1 to 10" to
--claim 1--

Claim 12: Line 1, change "one of claims 1 to 11" to
--claim 1--

Claim 17: Line 1, change "one of claims 1 to 16" to
--claim 1--


REMARKS

The specification has been amended to provide a cross-reference to the previously filed International Application. The claims have also been amended to delete improper multiple dependencies and to place the application into better form for examination. Entry of the present amendment and favorable action on the above-identified application are respectfully requested.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 
Michael R. Mutter, #29,680
32,181

MKM/cqc
179-163P

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

A camera tracking system for a virtual television or video studio

The present invention refers to a novel camera tracking system for a virtual television or video studio.

In producing virtual film or video sequences, the images recorded by a camera, for example, images of a person, are combined in a special device with a background (electronic set) that is not really present (i.e. virtual), or with other details generated in the device (a so-called virtual studio). In order to integrate the person filmed by the camera into the virtually generated background with precision and positional accuracy, the respective actual position and orientation of the recording camera (studio camera) must be known.

Up to the present, the position of the recording camera has been calculated starting from a zero position by measuring the distance traveled and the Orientation of the camera has been determined by measuring the pivot angle, the pitch angle, and the rolling angle using corresponding incremental sensors (Sommerhäuser, F.: Das virtuelle Studio; in: FERNSEH- UND KINO-TECHNIK, 50. Jhrg., 1996, Nr. 1-2, p. 11-15, 18-22). To this end it is necessary to install corresponding incremental sensors on the camera and each joint and each axis of its stand (tripod). This known system requires a relatively high effort in measurement techniques.

From Interner Broadcast Convention IBC '97, Convention Publication, pages 284-289, and WO-A-94/05118, respectively, a camera tracking system is known wherein the camera is provided with an auxiliary camera directed towards the studio ceiling for detecting bar code marks on the studio ceiling. Using the bar codes detected by the camera, a corresponding computer can determine the exact position of the camera in the studio. Through this known camera tracking system, the position of the camera in the studio may be determined, however, incremental sensors still have to be used to determine the height of the camera above the ground and the pivot angle, the rolling angle and the pitch angle of the camera.

It is the object of the present invention to provide a camera tracking system that precisely, quickly and reliably determines the position and orientation of a camera adapted to be moved freely in a room.

- at least three emitter devices for emitting electromagnetic radiation, the emitter devices being adapted to be mechanically coupled with the recording camera,

- a computer unit for evaluating the electromagnetic radiation detected by the detector devices and emitted by the emitter devices and for determining the position and/or the orientation of the at least three emitter devices relative to the at least two detector devices.

In the present camera tracking system, at least three emitter devices emit electromagnetic radiation, the emitter devices being adapted to be coupled with the recording camera either directly or indirectly, e.g., via the stand of the recording camera. The emitter devices may be provided as active or passive

devices. Whereas an active device generates and emits electromagnetic radiation, a passive emitter device operates on the reflector principle, reflecting electromagnetic radiation. The electromagnetic radiation from the emitter devices is detected by at least two detector devices. Each detector device is able to simultaneously and selectively detect a plurality of emitter devices, the relative position of the detected emitter devices being determined through each detector device. Whether a detector device detects a single emitter device or a plurality of emitter devices depends on the orientation of the recording camera with which the emitter devices are mechanically coupled either directly or indirectly. Each detector device is itself connected to a evaluating the electromagnetic radiation detected by the detector devices and emitted from the emitter devices, by determining the position and/or the orientation of the at least three emitter devices relative to each other, based on the determined position of the emitter devices as detected by each of the detector devices.

A camera tracking system structured according to this teaching is advantageous in that the emitter device is moved immediately along with the studio/recording camera when the latter is moved and in that the spatial position of the emitter device is wirelessly detected by detecting cameras distributed over the studio. The recorded data are then evaluated directly by the computer so the computer is aware of the actual position and orientation of the recording camera in the studio, and the same can be used for the television or video sequences.

Mounting the emitter devices directly on the recording camera or at the housing thereof or at a stand supporting the recording camera, is further advantageous in that the present camera tracking system can be used to determine the position of the camera on the ground (e.g. in the studio) and also to determine the momentaneous level of the camera above the ground, the actual pitch angle, the actual rolling angle and the actual pivot angle. Thus, it is possible, for example, for the camera man to carry his studio camera on the shoulder for a greater freedom of movement when recording the objects. In this case,

the present camera tracking system is adapted to precisely, quickly and reliably determine the position in the studio and the position (height, rolling angle, pitch angle and pivot angle) of the camera.

The zoom and the focus of the studio camera are suitably determined using incremental path sensors integrated in the optics and detecting the setting of the respective optical elements. These path sensors, or detectors in general, are also connected to the computer unit to generate the studio background together with the detected position and orientation of the studio camera.

With the present camera tracking system it is possible to determine a position using three emitter devices and two detector devices, however, it is advantageous to employ five emitter devices and two detector devices. Using more than three emitter devices not only allows to determine the position of the camera, but also the height or the rolling angle or the pitch angle or the pivot angle, since the correlation of the individual emitter devices makes it possible to draw corresponding conclusions. The use of more than two detector devices allows the preset camera tracking system to more reliably determine the position of the individual emitter devices in the room since redundant data will be at hand.

Specifically, the connected computer determines a straight line through each emitter device starting from each detector device. The intersection of these straight lines lies exactly in the emitter device. Since the straight lines will not meet exactly in one point, due to measuring or calculation errors, a theoretical intersection is calculated by means of mathematic methods for error minimization. The correspondence between this theoretical intersection and the actual site of the emitter device is the more precise, the more straight lines are available.

Another advantage of this redundant system is that the computer has access to sufficient information for determining the position and the orientation of

the studio camera if the emitter device for the one or the other detector device cannot be detected or if the emitter devices unfavorably cover each other. Experiments have shown that a camera tracking system with five emitter devices and four detector devices already ensures a very reliable and very precise determination of the position and the orientation of the studio camera. In an advantageous embodiment of the present camera tracking system ten or even twelve detector devices are used so that this camera tracking system allows for an even more precise and reliable determination of the position and the orientation of the studio camera.

The emitter devices to be employed with the invention are, in particular, light sources suitably emitting infrared light. The detector devices are preferably designed as detecting cameras. All other variants of the invention mentioned above can also be applied to the situation that the emitter devices are light sources and the detector devices are detecting cameras. This is also true for the following contemplations, wherein, for simplicity, "light sources" is used for emitter devices and "detecting cameras" is used for detecting devices.

Disposing the detecting cameras at least one meter above the light sources is advantageous in that a favorable angle of view is thus provided. In this case, the movement of the light sources (i.e., the studio camera) generates a displacement of the light source that is well visible in the images respectively supplied by the detecting cameras so that the evaluation by the computer is facilitated and made more precise thereby.

Distributing the detecting cameras in the studio as uniformly as possible has the advantage that the light sources are detected from a plurality of largely different angles of view so that a reliable geometric evaluation is achieved thereby.

In a preferred embodiment of the present camera tracking system, the light sources are all arranged in one plane at a supporting element that, in particular, takes the form of a ring. This is advantageous in that the light sources are arranged in a compact manner, yet they are spaced apart as far as possible so that a good detection by the detecting cameras is possible.

In a preferred development, a distance element is arranged between the light source and the ring so that the reflections from the light sources onto the ring are minimized and the light source is detected by the detecting camera as a point, as desired.

It is further suitable to make the vicinity of the light sources non-reflective, preferably black, so as to be able to detect the light sources with a rich contrast.

The arrangement of the light sources on a ring divided into equidistant sections, where one section or fixed point more than the total number of light sources is provided, has the advantage that a distinct asymmetric gap is left on the ring that is used for a unique identification of the light sources. Thus, it is achieved that the light sources are possibly all the same distance apart so as to be well identified on the images detected by the detecting cameras, and that at the same time an unambiguous direction can be associated with the ring of light sources. This clear direction may also be obtained, however, by arranging the light sources in a predetermined irregular pattern.

The use of infrared light in the present camera tracking system is advantageous in that the detecting cameras will not inadvertently detect other light sources in the studio and that scattered light occurring in the studio can be neglected.

In another, preferred embodiment the operating voltage at the light source is lower than the desired voltage of the light source. Specifically, when using a 12 Volt halogen lamp, an operating voltage of 4.5 Volt is applied. This is

advantageous in that the light source mostly emits light in the infrared range and thus does not influence the overall lighting of the studio. It is another advantage that such low operating voltage lamps have a longer serviceable life and are less prone for trouble.

In a further preferred embodiment, the detecting camera is a commercially available CCD-TV camera for black-and-white shooting. Such TV cameras are available at low prices and usually include a filter for filtering out infrared light, since infrared light is undesirable for normal applications. The present camera tracking system, however, mostly uses infrared light so that this infrared filter integrated in the CCD TV camera may be removed for the CCD TV camera to also detect infrared light well.

In another, preferred embodiment, the detecting camera is provided with a filter filtering out visible light and transmitting only infrared light so that other light sources in the studio or undesired reflections in the range of visible light will not be detected by the detecting camera and cause an erroneous detection of the infrared light sources provided at the camera.

In another, preferred embodiment, the detecting camera has an automatic shutter control. Thus, the detecting camera may automatically control the amount of incident light required for the detection of the light sources.

In still another preferred embodiment of the present camera tracking system, the detecting camera operates at an image frequency of 50 Hertz (in Europe) and 60 Hertz (overseas), respectively, so that the detecting camera can be synchronized with the studio camera in an optimum manner. This is particularly advantageous because, in this manner, the data for determining the position and/or the orientation of the camera are present quasi simultaneously with the image recorded by the studio camera so that an optimum adjustment of the studio image to the computer image/virtual image may be obtained.

In a further development, the light sources are not operated at AC but DC. Thus, the light sources emit light permanently so that synchronizing the light source and the detecting camera is obsolete. This results in substantial cost reduction.

In still another preferred development, the light source is enclosed by a non transparent but at least partly translucent sphere of a diameter between 1 cm and 10 cm, preferably 5 cm. Thus, the light emitted by the light source is projected uniformly onto the surface of the sphere so that the illuminated surface of the sphere can be detected by the CCD chip of the detecting camera in a simple manner. This uniform and at the same time comparatively large light spot is clearly different from the background that is dark, at least in the infrared range, and thus prevents a blurring of the pictures recorded by the detecting camera and allows for a precise positional determination of the respective light source. Advantageously, this sphere is milled from Teflon, which has proven very favorable.

The images thus recorded by the detecting camera are then processed by a data processing unit (computer). Suitably, this is effected such that the images are first binarized before using a calculation of the geometric center, known per se, to separately calculate a geometric center of each light source for each image. Thus, a very precise position of the respective light source can be defined for each image from each detecting camera. Since the computer knows the position and the orientation (coordinates) of each fixedly installed detecting camera, the computer can determine a straight spatial line for each detecting camera leading through the image point on the CCD chip of the respective light source and a fixedly defined point in the detecting camera up to the light source. By superimposing a plurality of these straight lines (corresponding to the number of detecting cameras), the position of the light source in the room can be determined since the light source has to be located in the intersection of these straight lines. In the next step, the computer calculates

the position and coordinates of the camera from the now known position of the different light sources.

As briefly mentioned above, it is advantageous to design the emitter devices as light sources in the form of lighting elements having a spheric light area. In the most simple case, the light sources may be lamps. These lamps project upward from the supporting element, whereby they are reliably detectable by the detecting camera. However, experiments have shown that the optical distance of the centers of two adjacent light sources is very short given an unfavorable angle of the studio camera with respect to one or more detecting cameras so that a partial or complete optical overlapping of two light sources can occur. In this case, a detecting camera would see two different light sources as a single light source which could lead to faulty results. An optical overlapping of two light sources can best be avoided by light sources, or generally speaking, by emitter devices having planar emission surfaces. When light sources for emitting visible light or infrared light are used, the emission areas are backlit planar surface areas formed in the manner of discs, plates or the like. These planar surfaces are suitably located in the surface of the supporting member accommodating the lamps of the light sources.

A camera tracking system structured according to this development is advantageous in that the planar emission surfaces, which, in particular, are illuminated lighted surfaces, appear smaller or larger depending on the incident angle of the detecting camera, the lighted surfaces becoming smaller in extreme situations, mostly under an unfavorable angle to the detecting camera. The simultaneous reduction of the lighted surfaces and the optical distance, an optical overlapping will occur, if at all, only at extremely large pitches so that the detecting cameras will still supply useful data even if the angles between the studio camera and the detecting camera are extreme.

050103R = 000500

050103R = 000500

050103R = 000500

050103R = 000500

When a cover or window is used that allows only light of a certain wavelength, for example, light of a wavelength of 850 nm, or light of a very narrow wavelength range, for example, light at a wavelength between 850 nm and 870 nm, to pass, the above described effect is even increased.

The diffuse emission of the light from the cover or the window is advantageous in that the light radiated from the 50 light emitting diodes is received by the detecting cameras as a uniform light spot, i.e., the 50 light spots or points of the 50 light emitting diodes quasi merge into a large light spot or a "closed" lighted surface.

The contrast is increased even further by the cover or the window emitting the transmitted light diffusely.

In a preferred development, the cover is substantially planar, offering the advantage that the light source appears as a two-dimensional lighted surface (planar lighted surface).

In another preferred development, the cover or the window are circular in shape. This is advantageous in that the detecting camera detects the light source as a round or, depending on the incident angle of the detecting camera, as an elliptic light spot. Thus, distortions of the geometric shape occurring under certain incident angles are reduced to a minimum so that a simple and reliable determination of the geometric center is possible.

In an alternative embodiment, the light emitter accommodated in a recess in the frame may be provided with two covers, preferably arranged at right angles to each other, so that one and the same light emitter can radiate light beams both upward and sideward. With such an arrangement, the detecting camera identifies each of the two covers as a separate lighted area so that,

despite the light emitters being reduced to half their number, the same number of lighted areas is available to the detecting camera.

Thereby, the power consumption and thus the size of the required accumulator can be reduced, resulting in a substantial reduction of weight. A further reduction of weight and of costs is obtained by the lower number of light sources.

In a further preferred embodiment, the light source is formed by preferably 50 infrared light emitting diodes arranged within the frame in the recess or cut-out. The light emitting diodes operating in the infrared range require much less current than conventional lamps and, what is more, supply a higher amount of light in the infrared range. The latter substantially increases the contrast to the surrounding light. Moreover, the power consumption, and thus the required accumulator, may be reduced so that the overall weight of the camera tracking system can be reduced.

In another preferred embodiment, a plurality, preferably all, light sources can be switched individually. Thus, it is possible in a simple manner to initialize the camera tracking system. By subsequently turning on one light emitter at a time, the detecting cameras can define the respective light spot so that, later, the respective detected light spot can be associated with the correct position on the frame. It would be sufficient for initializing the camera tracking system to initialize at least one light spot in this manner, but the accuracy of the system increases if a plurality, or preferably all, light spots are initialized individually.

In another preferred embodiment, a gyroscope is mounted to the camera for determining the pivot angle, the pitch angle and the rolling angle of the camera. This gyroscope is used in addition to the detecting cameras so that a redundant determination of the orientation of the camera is effected. These

redundant measured values are then used by software to calculate the orientation of the camera.

In a preferred development, the measured values obtained from the gyroscope are optimized, specifically, smoothed by a linear optimum filter (Kaiman-Bucy filter). This allows for a more precise determination of the actual orientation of the camera.

In another alternative embodiment, the lighted area is formed as a reflector. Specifically, analogous to the above described covers, the frame is provided with preferably two-dimensional and planar reflectors (or mirrors) that may possibly be arranged under an angle with respect to each other. The visible or infrared light in the studio is reflected from these reflectors so that it can be detected by the detecting cameras. Thus, such reflectors have the same function and effect for the detecting camera as a lighted surface or a light source.

It is the advantage of these reflectors (in particular the mirrors) that no diodes or other lamps and no power supply, i.e. no heavy accumulators, are required, resulting in a substantial reduction in weight and cost.

In another preferred embodiment, the light emitters are pulsed, i.e. the light emitters are turned on at regular intervals for only a very short time. Here, it has proven advantageous to analogously also operate the detecting cameras in a pulsed and synchronous manner in order to avoid erroneous measuring. Using the connected computer, the light emitters and the detecting cameras may be synchronized in a simple manner.

By turning the light emitters, in particular the light emitting diodes, on for only a short time, these may shortly be operated at a higher voltage so that the light emitting diodes emit about three times the amount of light as they

| | (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) | (11) | (12) | (13) | (14) | (15) | (16) | (17) | (18) | (19) | (20) | (21) | (22) | (23) | (24) | (25) | (26) | (27) | (28) | (29) | (30) | (31) | (32) | (33) | (34) | (35) | (36) | (37) | (38) | (39) | (40) | (41) | (42) | (43) | (44) | (45) | (46) | (47) | (48) | (49) | (50) | (51) | (52) | (53) | (54) | (55) | (56) | (57) | (58) | (59) | (60) | (61) | (62) | (63) | (64) | (65) | (66) | (67) | (68) | (69) | (70) | (71) | (72) | (73) | (74) | (75) | (76) | (77) | (78) | (79) | (80) | (81) | (82) | (83) | (84) | (85) | (86) | (87) | (88) | (89) | (90) | (91) | (92) | (93) | (94) | (95) | (96) | (97) | (98) | (99) | (100) |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | 99 | 100 | |

1000

[illegible]

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

[illegible]

this is done by laying a "carpet" in the studio that has the grid thereon. The orientation and the position of the "carpet" within the studio should be known.

It is advantageous to calibrate the present camera tracking system using electromagnetic radiation from a calibration device which again, preferably, is a light source. This calibration device is moved through the studio and detected by detector devices. Thus, a geometric relation of the detector devices among each other is calculated. In a second step, the calibration device is stationary and is detected by all detector devices. This provides for an alignment of the studio coordinate system to the geometric relation of the detector devices. In a last step, the calibration device is detected by the studio camera in order to fix the so-called nodal point of the studio camera relative to the emitter devices coupled with the studio camera. Due to the previously determined geometric relation of the detector devices to the calibration device, on the one hand, and the geometric relation of the studio camera to the calibration device, it is now possible to determine the geometric relation of the emitter devices coupled with the studio camera and the nodal point of the camera. Thus, the entire system is calibrated.

Further advantageous embodiments of the invention are mentioned in the dependent claims. For what is not mentioned in the above or the following regarding these embodiments, reference should be made to the corresponding dependent claims.

Further advantages of the present camera tracking system are obvious from the attached drawings and the following description of embodiments, serving to explain the invention using (infrared) light sources and CCD detecting cameras. According to the invention, the above and further detailed features may be used either individually or in any combination. The embodiments mentioned are not intended as a final enumeration, but rather are of exemplary nature.

Fig. 1 illustrates a virtual studio including a first embodiment of a camera tracking system according to the present invention,

Fig. 2 shows a studio camera according to the first embodiment with annularly arranged light sources mounted thereto,

Fig. 3 is a flow chart for illustrating the method of tracking the studio camera,

Fig. 4 is a perspective lateral view of a studio camera according to a second embodiment with an annular frame mounted thereto,

Fig. 5 illustrates the annular frame of the studio camera of Fig. 4,

Fig. 6 is a sectional view of the frame of Fig. 5 along the line VI-VI, and

Fig. 7 is a sectional view of the frame of Fig. 5 along line VII-VII.

Fig. 1 illustrates a blue-room studio 10 with a (studio) camera 12 and four detecting cameras 14 suspended from the ceiling. The detecting cameras 14 are suspended as high as possible and as far as possible from the center of the blue-room studio and are distributed over the blue-room studio such that they detect the studio from different angles of view.

The detecting camera 14 used here is a commercial CCD TV camera for black-and-white shooting that was rearranged so as to be able to receive infrared light. Specifically, the infrared filter usually present in commercial CCD TV cameras was removed and replaced with a filter filtering visible light and only transmitting infrared light. This restructuring yields a low-cost detecting camera that is adapted to particularly well detect light emitted in the infrared range. The light spots detected by the CCD chip are then supplied to a computer (not illustrated) for evaluation.

At a distance of about 50 cm, a ring 16 is mounted to the (studio) camera 12, which supports five light sources 20 through spacer elements 18. The light sources 20 are fixedly connected to the camera 12, therefore they follow all movements of the camera 12. The camera 12 is mounted on a vertically adjustable stand (tripod) 22, the legs of which have rollers so that the entire camera 12 can be moved through the blue-room studio 10 at will.

The ring 16 is divided into six sections of the same size so that six equidistant fixed points are produced on the ring 16. Each of the five light sources 20 is located on one of the six fixed points so that one fixed point 24 obviously remains free. This enables the detecting cameras 14 to unambiguously determine the orientation of the camera 12, since the arrangement of the light sources 20 is asymmetrical due to the free fixed point 24.

The light source 20 is a commercially available 12 Volt halogen lamp enclosed by a spherical housing of Teflon. The halogen lamps are operated at a DC voltage of 4.5 Volt so that they glow only weakly. The weak light emission thus obtained is mostly in the infrared range and may very well be detected by the detecting cameras 14 also operating in the infrared range. The housings made of Teflon are thin-walled such that one cannot see through, yet they are translucent. This results in a comparatively large light source 20 with an almost uniformly illuminated surface so that the detecting camera 14 can detect a clear light spot sharply contrasted with respect to the vicinity.

In Germany, the (studio) cameras 12 usually operate at an image frequency of 50 Hertz, while in America, an image frequency of 60 Hertz is used. For a correct association of the momentaneous position to the virtually generated background of the image by the computer evaluating the images supplied by the detecting camera 14, the detecting camera 14 should be synchronized with the (studio) camera 12 so that the exact momentaneous position can

be determined for each image recorded by the camera 12. Accordingly, the detecting camera 14 also operates at 50 or 60 Hertz, respectively.

The present camera tracking system's preferably operating in the infrared range has the advantage that scattered light and other light sources necessary for illuminating the actors or the stage are not or very badly detected by the detecting camera 14. The infrared light emitted by the light sources 20, however, is very well detected by the detecting camera 14, whereas the light in the visible range is filtered. By such a separation of the different light spectrums, the camera tracking system can reliably determine the position and orientation of the camera 12.

The images recorded by the detecting cameras 14 are evaluated as described below:

Advantageously, the detecting cameras 14 are fixedly mounted to the studio ceiling, the position and the orientation of each detecting camera being precisely defined by calibration. During operation of the present camera tracking system, four shots of the light sources 20 are taken by the detecting cameras 14 exactly simultaneously, i.e. at the same frequency as and synchronized with the (studio) camera, the images being supplied to a computer. The comparatively large light sources 20 form a correspondingly large light spot on the CCD chip of the detecting camera 14. The individual solid-state matrices of the CCD chips subsequently supply a corresponding signal to the computer, if the solid-state matrix receives infrared light beyond a certain threshold value.

The computer evaluates the received light signals such that it recognizes only those signals as a true light source which are supplied by a corresponding number of adjacent solid-state matrices (binarize). Subsequently, a commonly used calculation of the geometric center is employed to determine the geometric center of each light source in the image. To this end, a rather large design

of the individual light sources 20 is advantageous, since this allows the recording of relatively sharply outlined and at the same time rather large light spots. Moreover, the risk of confusing these with other light sources is minimized, since infrared light sources of this size are rare in a blue-room studio 10.

After having defined the individual light sources on each image of each detecting camera 14 by their geometric centers, a straight line is established extending through the geometric center of the light source on the CCD chip and a defined point within the detecting camera 14. Thus, the computer disposes of four straight spatial lines for each light source 20, which intersect at a certain point. This intersection is the actual location of the light source 20 in the blue-room studio 10. Since the different detecting cameras 14 detect the blue-room studio 10 from all sides, i.e. three-dimensionally, the position of each light source 20 in the room can be determined.

After having defined all five light sources 20 in the room, the position and the orientation (coordinates) of the (studio) camera 12 can be determined, since it is in a known relationship to the light sources 20.

In such measuring and evaluation of the light spots inaccuracies of measurement and/or calculation can inherently occur so that, in practice, it may happen that the four straight lines established by the computer do not really met in one point. Therefore, the computer performs generally known analytic error estimations so as to define a spatial point from the established four straight lines that correspond as exactly as possible to the actual position of the light source.

In an embodiment (not illustrated), the present camera tracking system has ten or more detecting cameras. Among other things, this is advantageous in that ten straight lines can be defined in space that, theoretically, should

09601838:00000

meet in one point. These additional, redundant straight lines further increase the accuracy of the arithmetically determined light source as compared to the actual light source, since the additional data material can be used to better eliminate occurring measuring and/or calculating errors. It is another advantage that the redundant detecting cameras reliably detect the individual light spots, i.e. that an inadvertent covering of individual light spots has no great impact on the evaluation.

Figs. 4 to 7 illustrate the light sources of an alternative camera tracking system, mounted on a ring (frame). As far as the elements of this alternative system correspond to or are similar to those of the camera tracking system of Figs. 1 to 3, they have been accorded the same reference numerals. Fig. 4 shows a (studio) camera 12 positioned on a tripod 22, which is provided with an annular frame 32 through a support member 20. This frame 32, rectangular in cross section and annular for the rest, has a number of circumferentially distributed, vertically arranged light areas or surfaces 20 and a number of horizontally arranged light areas or surfaces 21 independent from the light areas 20 and distributed over the front face of the frame 32. In the embodiment illustrated, the light areas 21 on the front face are each offset with respect to the circumferentially disposed light areas 20, the distance between the light areas 20, 21 approximately corresponding to the diameter of the light areas 20, 21.

In another embodiment (not illustrated), the light areas 21 on the front face and the light areas 20 on the circumference are in alignment with each other so that both may be supplied by the same light emitter.

As is evident from Figs. 6 and 7, in particular, the frame 32 has a number of recesses 34 accommodating the respective light emitter, the light emitter being formed by about 50 infrared light emitting diodes 36 arranged on the bottom of the recess 34. Here, the light emitting diodes 36 are orientated

The cover 40 made from film-covered glass material only transmits light with a wavelength greater than 800 nm, the light being radiated diffusely so that light radiated from the light emitting diodes 36 as a point is detected by the detecting cameras as a uniform light spot. Thus, it is ensured that only infrared light, invisible to the human eye, can pass, which is then detected by the detecting cameras (not illustrated).

The light emitting diodes are pulsed at a frequency of 50 Hz, the shutter of the shutter camera being operated synchronously therewith. Both are controlled through the connected computer. It has been found that the contrast is sharpest when the shutter speed equals the lighting period of the light emitting diodes, it being advantageous to open the shutter only after the light emitting diodes radiate light at full power. When 50 light emitting diodes are used, a lighting period, and thus a shutter speed of 1/5000 second, has proven sufficient.

In an alternative embodiment (not illustrated), a recess has two openings, one directed upward through the front face of the frame, whereas the other is directed sideward through the circumferential side of the frame. Both openings are also closed with a cover that transmits only infrared light. In this embodiment, the light emitting diodes are arranged such that the infrared light emitted therefrom can leave the frame from both openings. Thus, one light emitter can generate two light areas that seem different to the detecting camera, resulting in considerable energy saving and reductions in weight and costs.

In order to determine the position and orientation or direction of a studio camera by means of the present camera tracking system according to one of the embodiments described, the following steps are taken after the system has been calibrated (refer to the explanation of the method detailed in the paragraph before the description of the embodiments, or refer to claim 11). First, the light sources 20, attached directly to the studio camera 12 or indirectly via the stand 22, are detected by the detecting cameras 14. The images thus obtained are binarized for a subsequent separate calculation of the geometric center of each light source 20 in each image. Thereafter, the calculated geometric centers are defined as the momentaneous position of the respective light source in the respective image. Taking into account the defined positions in the images from the detecting cameras 14 involved, the spatial position of each single light source 20 is then determined. Using this determination, the momentaneous position and/or the momentaneous orientation or direction of the studio camera 12 is calculated from the spatial position of the individual light sources 20. When the momentaneous position and direction or orientation of the studio camera 12 has been calculated, the graphic computer, which generates the virtual background in the blue studio 10, may generate the background image corresponding to the camera position and orientation and the same may be projected onto the background.

Claims

1. A camera tracking system for a virtual television or video studio for determining the position and/or orientation of a recording camera, comprising:

- at least three emitter devices for emitting electromagnetic radiation, the emitter devices being adapted to be mechanically coupled with the recording camera,

- at least two detector devices for detecting the position of the emitter devices based upon the electromagnetic radiation emitted by the emitter devices, each detector device being adapted to detect plurality of emitter devices,

- a computer unit for evaluating the electromagnetic radiation detected by the detector devices and emitted by the emitter devices and for determining the position and/or the orientation of the at least three emitter devices relative to the at least two detector devices, and

- a gyroscope adapted to be coupled to the emitter devices and supplying measured values, the gyroscope being connected to the computer unit, the computer unit processing the measured values from the gyroscope to correct the orientation of the emitter devices as determined on the basis of the detecting devices.

2. The camera tracking system of claim 1, characterized in that the emitter devices are active transmitter devices for emitting the electromagnetic radiation towards the detecting devices or passive reflector devices for reflecting electromagnetic radiation towards the detector devices.

3. The camera tracking system of claim 1 or 2, characterized in that the emitter devices are arranged on a support member adapted to be coupled with the recording camera.

4. The camera tracking system of claim 3, characterized in that the emitter devices are arranged on the support member such that they radiate the electromagnetic radiation from a common side surface or from two side surfaces disposed angularly relative to each other, in particular substantially at right angles.

5. The camera tracking system of claim 3 or 4, characterized in that the support member is a ring with an upper front face and a laterally extending circumferential face adjoining the front face.

6. The camera tracking system of claim 5, characterized in that the emitter devices are disposed on the front face of the ring.

7. The camera tracking system of claim 5 or 6, characterized in that the emitter devices are also disposed on the circumferential surface.

8. The camera tracking system of one of claims 1 to 7, characterized in that the emitter devices each have a spherical emitter surface from which the electromagnetic radiation is radiated and/or from which it is reflected.

9. The camera tracking system of claim 8, characterized in that the emitter devices each have a planar emitter surface from which the electromagnetic radiation is radiated and/or from which it is reflected.

10. The camera tracking system of claims 9 and 4, characterized in that the emitter surfaces lie in a common side surface or in the two angled side surfaces of the support member.

11. The camera tracking system of one of claims 1 to 10, characterized in

- that a calibration device is provided that emits electromagnetic radiation and is designed, in particular, as a light source preferably emitting in the infrared range, the calibration device being detectable by the detector devices and the studio camera, and
- that the computer unit
 - determines the geometric relationship of the detecting devices relative to each other from the signals supplied by the detector devices upon movement of the calibration device and determines the geometric relationship of the detector devices relative to the studio from the signals supplied by the detector devices with the calibration device standing still, and
 - determines the relative position of the nodal point of the studio camera to the arrangement of the emitter devices coupled to the studio camera, from the signals supplied by the studio camera upon detecting the calibration device.

12. The calibration tracking system of one of claims 1 to 11, characterized in that the emitter devices comprise light sources particularly emitting light in the infrared range, and that the detecting devices are designed as detecting cameras for the light from these light sources.

13. The camera tracking system of claim 12, characterized in that the light sources of the emitter devices are located in recesses of the support member, and that the recesses are each covered by a cover that forms the emitter surface.

ABSTRACT**A camera tracking system for a virtual television or video studio**

The invention relates to a camera tracking system for a virtual television or video studio, used to determine the position and/or orientation of recording cameras and comprising at least three emitter devices for emitting electromagnetic radiation, which emitter devices can be mechanically coupled to the recording camera. The camera tracking system further comprises at least detecting devices for detecting the position of the emitter devices on the basis of the electromagnetic radiation emitted by said emitter devices, each detecting device being able to detect several emitter devices. A computer unit evaluates the electromagnetic radiation detected by the detecting devices and emitted by the emitter device, and determines the position and/or orientation of the at least three emitter devices in relation to the at least two detecting devices.

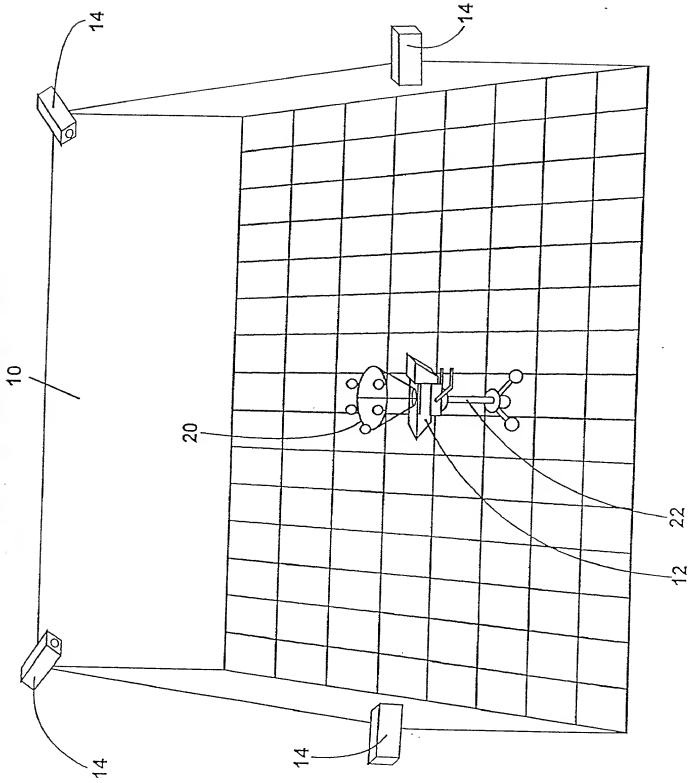


FIG. 1

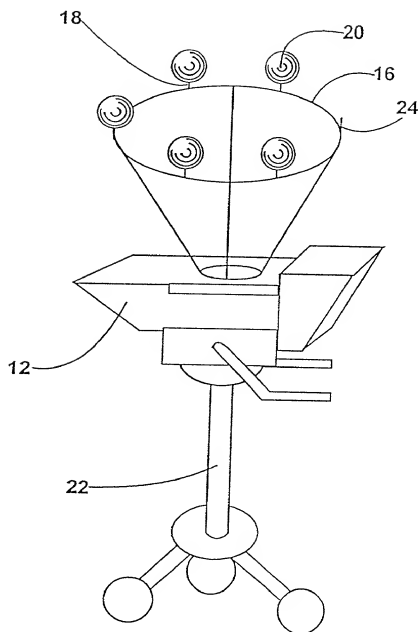


FIG. 2

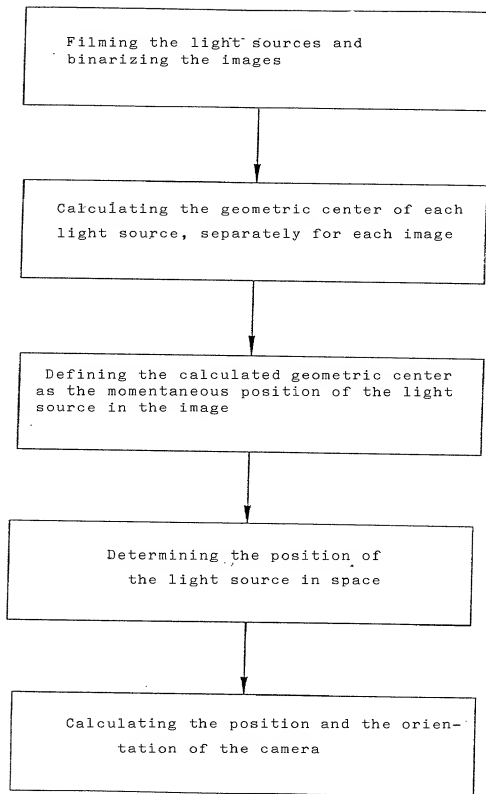


FIG. 3

09/601838-080900

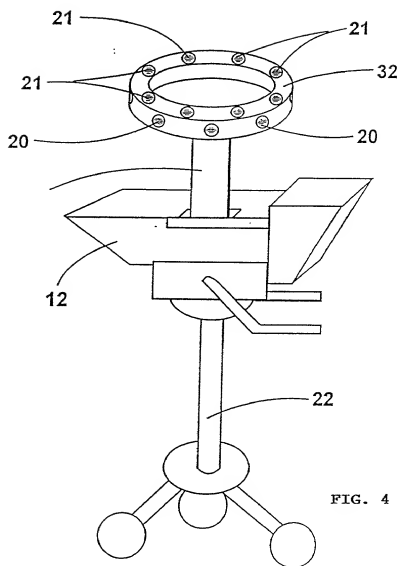


FIG. 4

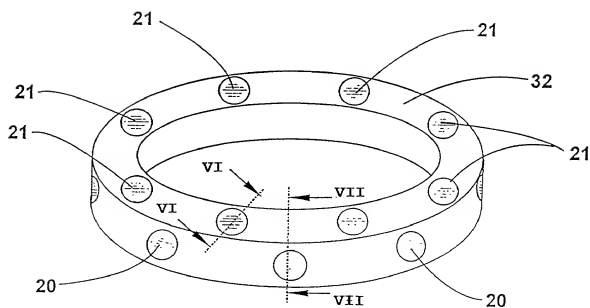


FIG. 5

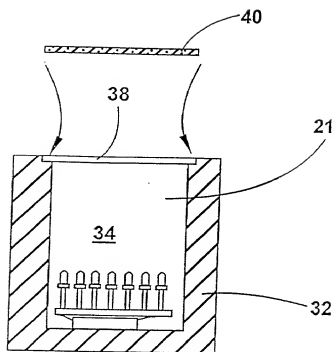


FIG. 6

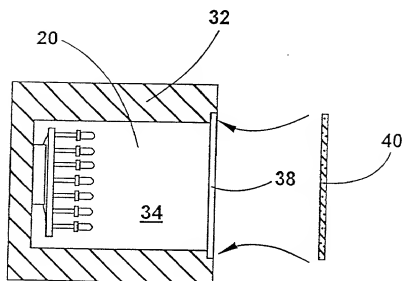


FIG. 7

COMBINED DECLARATION AND POWER OF ATTORNEY

ATTORNEY DOCKET NO.

179-163P

FOR PATENT AND DESIGN APPLICATIONS

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:*

Insert Title

Camera tracking system for a virtual television or video studio

Check Box If
Appropriate -
For Use Without
Specification
Attached

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number _____ or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

| | | | | | |
|-------------------------------------|--------------|-----------|------------------------|-------------------------------------|--------------------------|
| <input checked="" type="checkbox"/> | 198 06 646.5 | Germany | February 18, 1998 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | (Number) | (Country) | (Month/Day/Year Filed) | Yes | No |
| <input checked="" type="checkbox"/> | 198 40 656.8 | Germany | September 5, 1998 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | (Number) | (Country) | (Month/Day/Year Filed) | Yes | No |
| | (Number) | (Country) | (Month/Day/Year Filed) | <input type="checkbox"/> | <input type="checkbox"/> |
| | (Number) | (Country) | (Month/Day/Year Filed) | Yes | No |
| | (Number) | (Country) | (Month/Day/Year Filed) | <input type="checkbox"/> | <input type="checkbox"/> |
| | (Number) | (Country) | (Month/Day/Year Filed) | Yes | No |

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Country

Application No

Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number)

(Filing Date)

(Status — patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status — patented, pending, abandoned)

*NOTE: Must be completed.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary: 179-163P

RAYMOND C. STEWART (Reg. No. 21,066)
 JOSEPH A. KOLASCH (Reg. No. 22,463)
 JAMES M. SLATTERY (Reg. No. 28,380)
 CHARLES GORENSTEIN (Reg. No. 29,271)
 LEONARD R. SVENSSON (Reg. No. 30,330)
 MARC S. WEINER (Reg. No. 32,181)
 JOE MCKINNEY MUNCY (Reg. No. 32,334)
 C. JOSEPH FARACI (Reg. No. 32,350)

TERRELL C. BIRCH (Reg. No. 19,382)
 ANTHONY L. BIRCH (Reg. No. 26,122)
 BERNARD L. SWEENEY (Reg. No. 24,448)
 MICHAEL K. MUTTER (Reg. No. 29,680)
 GERALD M. MURPHY, JR. (Reg. No. 28,977)
 TERRY L. CLARK (Reg. No. 32,644)
 ANDREW D. MEIKLE (Reg. No. 32,868)
 ANDREW F. REISH (Reg. No. 33,443)

Send Correspondence to: **BIRCH, STEWART, KOLASCH AND BIRCH, LLP**

P.O. Box 747
 Falls Church, Virginia 22040-0747
 Telephone: (703) 205-8000
 Facsimile: (703) 205-8050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor:

Insert Name of Inventor

Insert Date This Document Is Signed

Insert Residence

Insert Citizenship

Insert Post Office Address

Full Name of Second Inventor, if any:

see above

Full Name of Third Inventor, if any:

see above

Full Name of Fourth Inventor, if any:

see above

Full Name of Fifth Inventor, if any:

see above

| | | | |
|---|-------------------------------|---|----------------------------|
| GIVEN NAME Hendrik | FAMILY NAME Fehlis | INVENTOR'S SIGNATURE <i>Hendrik Fehlis</i> | DATE* 20.6.2000 |
| Residence (City, State & Country) 53773 Hennef, Germany | | CITIZENSHIP German | |
| POST OFFICE ADDRESS (Complete Street Address including City, State & Country) Alter Weg 60-62, 53773 Hennef, Germany | | | |
| GIVEN NAME Thomas | FAMILY NAME Mayer | INVENTOR'S SIGNATURE <i>Thomas Mayer</i> | DATE* 20.06.2000 |
| Residence (City, State & Country) 53757 Sankt Augustin, Germany | | CITIZENSHIP German | |
| POST OFFICE ADDRESS (Complete Street Address including City, State & Country) von-Eichendorff-Strasse 14, 53757 Sankt Augustin, Germany | | | |
| GIVEN NAME Uwe | FAMILY NAME Schnepf | INVENTOR'S SIGNATURE <i>Uwe Schnepf</i> | DATE* 20.6.2000 |
| Residence (City, State & Country) 53757 Sankt Augustin, Germany | | CITIZENSHIP German | |
| POST OFFICE ADDRESS (Complete Street Address including City, State & Country) Kopernikusstrasse 21, 53757 Sankt Augustin, Germany | | | |
| GIVEN NAME Thorsten | FAMILY NAME Mika | INVENTOR'S SIGNATURE <i>Thorsten Mika</i> | DATE* 20.6.2000 |
| Residence (City, State & Country) 51373 Leverkusen, Germany | | CITIZENSHIP German | |
| POST OFFICE ADDRESS (Complete Street Address including City, State & Country) Friedensstrasse 35, 51373 Leverkusen Germany | | | |
| GIVEN NAME | FAMILY NAME | INVENTOR'S SIGNATURE | DATE* |
| Residence (City, State & Country) | | CITIZENSHIP | |
| POST OFFICE ADDRESS (Complete Street Address including City, State & Country) | | | |

*Note: Must be completed
 — date this document is
 signed